


Product Info

Lock nuts, flanged
Lock Nuts Flanged, Polyamide
M40x1,5 /SW=50mm
BML-15 , BML-05 , BML-25

- For standard industrial applications.
- Safe fastening of cable glands.
- Flanged design offers safe sealing.

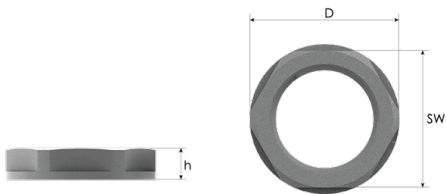

Images might not be representative of the actual colour, size or shape of the product listed

Technical Details			
Material		PA 6 GF 30 (Polyamide 6, 30% Glass Fiber Reinforced)	
Flammability		HB according to UL94	
Operating Temperature		Permanent	Intermittent
		-20 °C to +100 °C	-30 °C to +150 °C
Thread Type		Metric EN 60423	
		NPT ANSI B1.20.1	
		PG DIN 40430	
		Gas ISO 228	
Inner Thread Size (Female)		M40x1,5	
Spanner Width		50 mm	
Outer Ø (D)		55,3 mm	
Height (h)		7,0 mm	
Part Number	RAL 7035 light grey	BML-15	
	RAL 7001 grey	BML-05	
	RAL 9005 black	BML-25	

