


DATA SHEET: IK020022

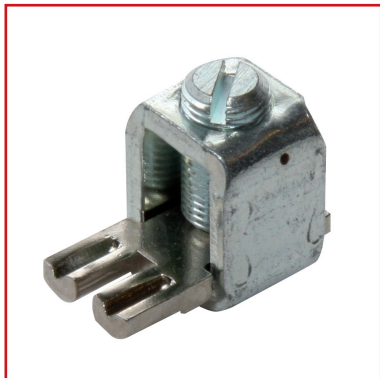


SCHRACK-INFO

Connection-terminal for brass-connection-busbar IK020018 to connect up to an cross-section 35mm².

TECHNICAL DATA

Standards:	in according to ÖNORM EN 60439-2:2000 and EG-Niederspannungsrichtlinie 2006/95/EG
Rated Connecting Capacity:	
Solid / stranded	min. 6mm ² max. 35mm ²
Flexible with ferrule	min. 6mm ² max. 25mm ²
Rated Current I _n :	100 A
Rated operational voltage U _e :	400/690 V AC
Materials:	
Terminal housing	steel
Connector tongue	steel
Clamping screws	Steel thick layer passivated; M8x15mm
Length of the connection tab:	10,3 mm
Width of the connection tab:	12,0 mm slit in the middle
Weight of finished part:	20,0 g
Packaging unit:	50 pieces

DIMENSIONS

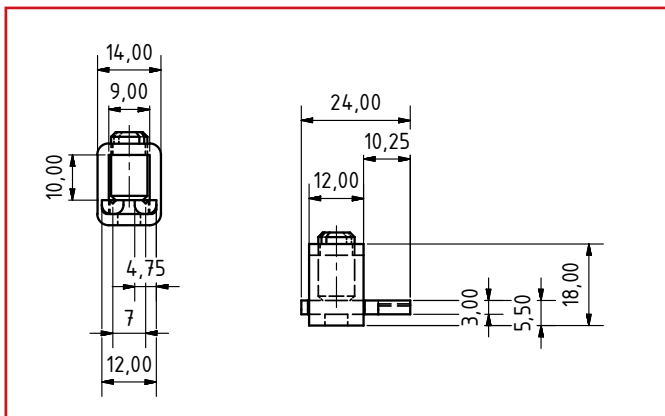

DESCRIPTION	ORDER NO:
Connect-Term 35mm ² for IK020018	IK020022