

Product Info


Lock nuts, flanged

Lock Nuts Flanged, Polyamide

M20x1,5 /SW=26mm

BML-12 , BML-02 , BML-22

- For standard industrial applications.
- Safe fastening of cable glands.
- Flanged design offers safe sealing.

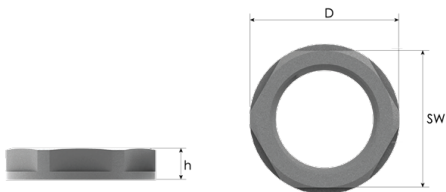

Images might not be representative of the actual colour, size or shape of the product listed

Technical Details		
Material		PA 6 GF 30 (Polyamide 6, 30% Glass Fiber Reinforced)
Flammability		HB according to UL94
Operating Temperature		Permanent
		Intermittent
		-20 °C to +100 °C
		-30 °C to +150 °C
Thread Type		Metric EN 60423
		NPT ANSI B1.20.1
		PG DIN 40430
		Gas ISO 228
Inner Thread Size (Female)		M20x1,5
Spanner Width		26 mm
Outer Ø (D)		28,6 mm
Height (h)		6,0 mm
Part Number	RAL 7035 light grey	BML-12
	RAL 7001 grey	BML-02
	RAL 9005 black	BML-22

bimed