

# Technical data sheet

## Quick clip

Art.-Nr. 2149004



**PP** Polypropylene

OBO Quick clip, type 2955/...: For all metric steel armoured pipes, as well as light-duty and heavy-duty metric insulation pipes. Suitable for mounting the OBO Quick pipe.

Pipe centring aids allow optimal attachment of the pipe and automatically turn the clip into the correct position.

Universal fastening option; can be arranged with the OBO Multi-quick and starQuick clip.

Slot for side alignment during mounting with wood screw or knock-in anchor.

Size M16-M32 can be screwed onto an M6 thread.

Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.

### Master data

Item no.	2149004
Type	2955 M16
Description 1	Quick clip
Dimension	M16
Colour	Light grey
RAL number	7035
Material	Polypropylene
Material symbol	PP
Smallest sales unit	100,00 Piece
Weight	0,25 kg/100 pc.


# Technical data sheet

## Quick clip

Art.-Nr. 2149004



### Technical data

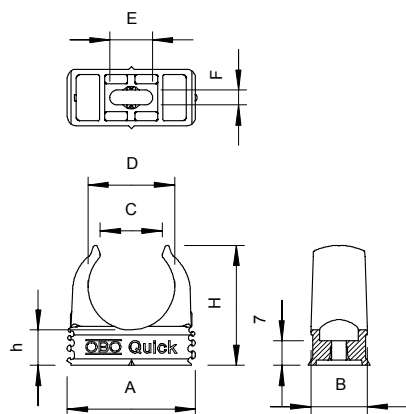

Dimension A	25,30 - 25,30 mm
Dimension B	16,00 mm
Dimension C	11,5 mm
Dimension D	15,50 mm
Dimension E	7,00 mm
Dimension F	4,20 mm
Dimension H	25,00 mm
Dimension h	7,00 mm
Expandable	<input checked="" type="checkbox"/>
Number of cables/pipes	1,00
Pull-out value	75 N
Fastening type	Screw hole
Breaking load	0,08 kN
Flame resistant	Flame resistant to VDE 0471/DIN 695 Part 2-1, test temperature 650 °C
Closed	<input type="checkbox"/>
Nominal size	M16
Halogen-free	<input checked="" type="checkbox"/>
With inlay	<input type="checkbox"/>
Clip mounting	Gland hole, adjustable to fit thread M6
Clamping range D	16,00 - 16,00 mm
UV-resistant	<input type="checkbox"/>