Rittal – The System.

Faster – better – everywhere.

Punched section with mounting flange, 14 x 39 mm for VX, TS, SE, PC, IW, AX – VX 8619.720

Date : Aug 17, 2021

Punched section with mounting flange, 14 x 39 mm for VX, TS, SE, PC, IW, AX – VX 8619.720

created: 17.08.2021 on www.rittal.com/com-en



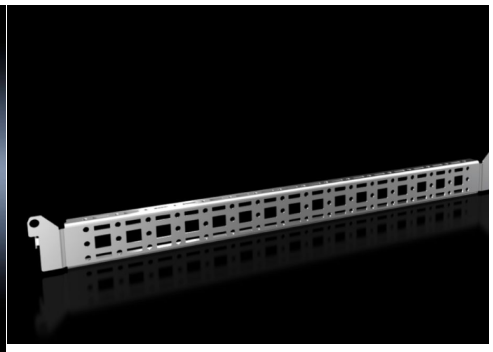

Product description

Description:	For attaching cable ducts, cable conduit holders, equipment installed on the door, etc.
Material:	Sheet steel
Surface finish:	Zinc-plated
Assembly instruction:	For installation in AX sheet steel, only in conjunction with rail for interior installation AX For installation in AX stainless steel, only in conjunction with perforated door strip
Supply includes:	Assembly parts
Note:	For installing your own components on the punched section with mounting flange, metal screws or self-tapping M5 screws are required

Product description

To fit:	Enclosure type: VX Enclosure type: TS Enclosure type: SE Enclosure type: AX Enclosure type: AX with locking rod Width/height/depth: 600 mm
Installation options:	In the VX, TS, SE, PC, IW, on the tubular door frame On identical punched sections with mounting flanges In the AX sheet steel, in the enclosure door with 3-point lock system in the lockable door In the AX stainless steel, in the enclosure door or lockable door, only in conjunction with the perforated door strip In the AX plastic, on mounting bosses in the door

To fit door width:	600 mm
Distance between attachment points:	475 mm
Packs of:	4 pc(s).
Weight/pack:	1.16 kg
Copper weight (kg per piece):	0
EAN:	4028177924697
Customs tariff number:	73269098
ETIM 7.0:	EC002625
ETIM 6.0:	EC002625
eCl@ss 8.0/8.1:	27189234
eCl@ss 6.0/6.1:	23159101
Product description:	VX Punched section, with mounting flange 14 x 39 mm, for door width: 600 mm