Product Info


Lock nuts, flanged

Lock Nuts Flanged, Polyamide

M50x1,5 /SW=60mm

BML-16 , BML-06 , BML-26

- For standard industrial applications.
- Safe fastening of cable glands.
- Flanged design offers safe sealing.

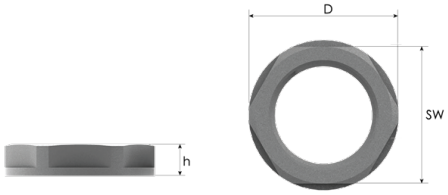

Images might not be representative of the actual colour, size or shape of the product listed

Technical Details

Material		PA 6 GF 30 (Polyamide 6, 30% Glass Fiber Reinforced)	
Flammability		HB according to UL94	
Operating Temperature		Permanent	Intermittent
		-20 °C to +100 °C	-30 °C to +150 °C
Thread Type		Metric EN 60423	
		NPT ANSI B1.20.1	
		PG DIN 40430	
		Gas ISO 228	
Inner Thread Size (Female)		M50x1,5	
Spanner Width		60,0 mm	
Outer Ø (D)		65,7 mm	
Height (h)		8,0 mm	
Part Number	RAL 7035 light grey	BML-16	
	RAL 7001 grey	BML-06	
	RAL 9005 black	BML-26	